


38206N2

2-in-1 Auto sensor faucet

KLUDI 

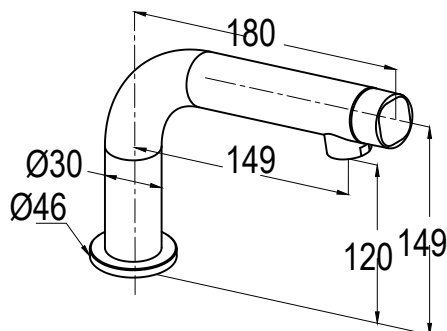

Technical Specifications:

Suite:	KLUDI-WAVE
Flow Rate:	3.9L/min at 3 bar
Power supply:	AC100-240V
Color:	Brushed Gun Metal
Max protect run time:	60 seconds
Aerator:	Neoperl
Dimensions:	198×158mm
Capacity:	3000ml


Code:

38206N2

Name:

KLUDI-WAVE
2-in-1 AUTO SENSOR FAUCET WITH SOAP DISPENSER - DECK MOUNTED
laser sensor activation
blue and red LED light display
The left sensor is for water and the right sensor is for soap
electric power supply AC100-240V
Water pressure 0.05 MPa – 0.80 MPa
G½" inlet thread
3000ml bottle capacity, output volume 0.6-2.0ml/cycle
Suitable soap viscosity, Liquid: 100-3500cps
Suitable soap PH 5-9
Certified to BS EN 15091:2013 standard

Water Flow Rate #:

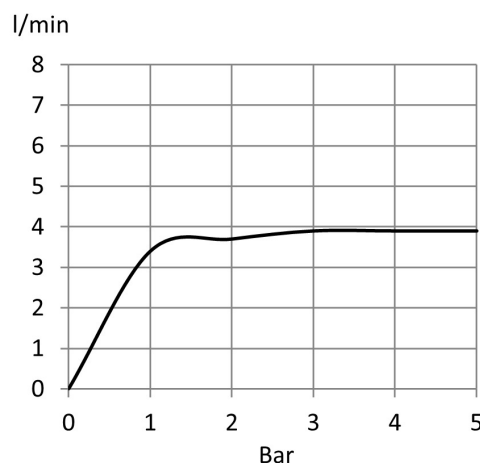

variation: ± 15%

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: ± 5% for below 200mm and ± 3% for above 200mm; for all other items tolerance ± 1%. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.