


**38207N5**  
**2-in-1 sensor faucet**

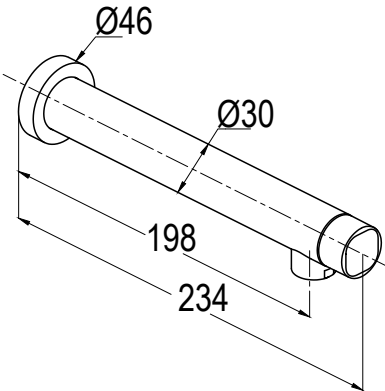


**Technical Specifications:**

|                       |                   |
|-----------------------|-------------------|
| Suite:                | KLUDI-WAVE        |
| Flow Rate:            | 3.9L/min at 3 bar |
| Power supply:         | AC100-240V        |
| Color:                | Brushed Nickel    |
| Max protect run time: | 60 seconds        |
| Aerator:              | Neoperl           |
| Dimensions:           | 234mm (L)         |
| Capacity:             | 3000ml            |

| Code:   | Name:                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 38207N5 | KLUDI-WAVE<br>2-in-1 AUTO SENSOR FAUCET WITH SOAP DISPENSER - WALL MOUNTED<br>laser sensor activation<br>blue and red LED light display<br>The left sensor is for water and the right sensor is for soap<br>electric power supply AC100-240V<br>Water pressure 0.05 MPa – 0.80 MPa<br>G½" inlet thread<br>3000ml bottle capacity, output volume 0.6-2.0ml/cycle<br>Suitable soap viscosity, Liquid: 100-3500cps<br>Suitable soap PH 5-9<br>Certified to BS EN 15091:2013 standard |

**Water Flow Rate #:**

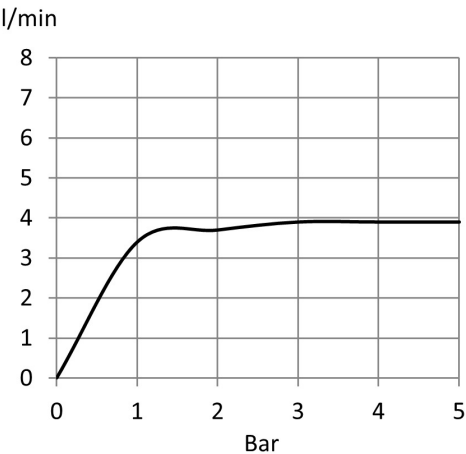

# variation: ± 15%

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: ± 5% for below 200mm and ± 3% for above 200mm; for all other items tolerance ± 1%. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.