


KLUDI-PUSHTRONIC ELECTRONIC CONCEALED THERMOSTATIC FITTING



38300NO-00
Shower Mixers

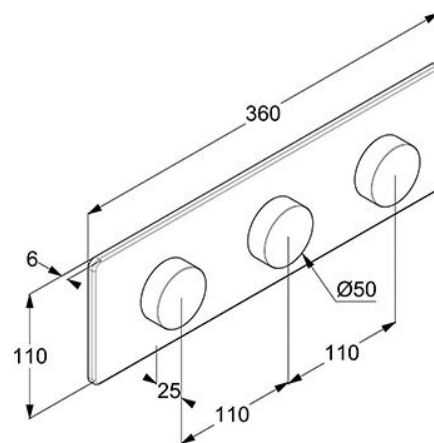

Technical Specification

Series:	KLUDI-TRONIC
Color:	brushed gold
Dimensions:	2.5 x 36 x 11cm
Water Efficiency:	High Efficiency
Installation Type:	Concealed

Name:

- 1 x rotating and push button for temperature adjustment
- 2 x rotating and push buttons for quantity adjustment and on/off
- wall fastening
- concealed plastic housing
- with additional tight gasket
- sealing according to DIN18534
- Power supply 12 volts (cable from water connection box)
- Water connection box IP54
- electric power supply via 230 V main adapter
- CE marking
- with WIFI module
- Operation via trim set

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: $\hat{A}\pm 5\%$ for below 200mm and $\hat{A}\pm 3\%$ for above 200mm; for all other items tolerance $\hat{A}\pm 1\%$. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.

- simultaneous use of 2 consumers possible
- dirt cleaner sieve
- protected against back flow
- Safety function at 38°C
- Temperature limitation 44°C
- Thermal disinfection max. 70°C possible
- Start temperature individually adjustable
- Start- flow rate individually adjustable

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: $\pm 5\%$ for below 200mm and $\pm 3\%$ for above 200mm; for all other items tolerance $\pm 1\%$. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.