


KLUDI-PUSHTRONIC ELECTRONIC CONCEALED THERMOSTATIC FITTING



38300N2-00
Shower Mixers

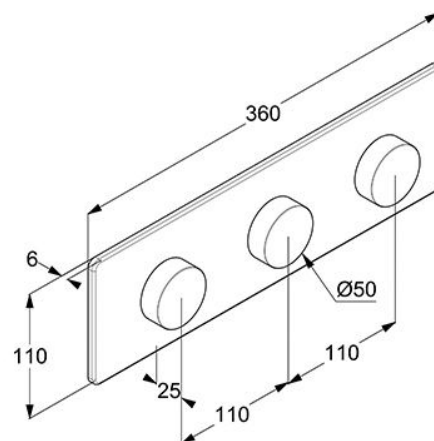

Technical Specification

Series:	KLUDI-TRONIC
Color:	brushed gunmetal
Dimensions:	2.5 x 36 x 11cm
Water Efficiency:	High Efficiency
Installation Type:	Concealed

Name:

- KLUDI-PUSHTRONIC
- electronic concealed thermostatic fitting
- pre-installation set with Trim-set
- trim set IP65
- to control temperature and flow rate
- 1 x rotating and push button for temperature adjustment
- 2 x rotating and push buttons for quantity adjustment and on/off
- wall fastening
- concealed plastic housing
- with additional tight gasket
- sealing according to DIN18534
- Power supply 12 volts (cable from water connection box)

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: $\hat{A}\pm 5\%$ for below 200mm and $\hat{A}\pm 3\%$ for above 200mm; for all other items tolerance $\hat{A}\pm 1\%$. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.

- with WIFI module
- Operation via trim set
- with option for APP control
- Connection cold water/ hot water G 1/2
- Connection of 1 to 2 consumers (G 1/2) possible
- simultaneous use of 2 consumers possible
- dirt cleaner sieve
- protected against back flow
- Safety function at 38°C

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: $\hat{\pm}$ 5% for below 200mm and $\hat{\pm}$ 3% for above 200mm; for all other items tolerance $\hat{\pm}$ 1%. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.