

**Product:** KLUDI E-GO electronic and single-lever controlled sink mixer DN 10

**Ref.:** 422000575

### Product description

electronic and single-lever controlled sink mixer DN 10  
solid lever, single hole mounted  
flow class A, Cache-aerator M 21,5 x I  
ceramic cartridge with hot water safety device  
adjustable temperature through lever employment  
sensory operation, automatic sensory measuring  
electronic unit with control device  
electric power supply via 230 V main adapter  
with magnet-cartridge unit  
swivelling spout (360°)  
back flow preventer with dirt-catcher sieve  
rapid installation set  
flexible high pressure supply tubes G 3/8. noise group I

Finishes:  
05 chrome

### Advertisement


- \* KLUDI GmbH & Co KG, KLUDI E-GO Electronic and single-lever controlled sink mixer DN 10 Art. Nr. 422000575
- \*\* powered by a 230 V power supply
- \*\*\* ceramic cartridge with hot water safety device, DIN EN 817
- \*\*\*\* brass in compliance with DIN 50930-6

Electronic and single-lever controlled sink mixer, manufacturer type KLUDI GmbH & Co KG KLUDI E-GO Electronic and single-lever controlled sink mixer DN 10 Art. Nr. 422000575, DN 10, made of brass in compliance with DIN 50930-6, finish: 05 = chrome, as single hole mounted sink mixer with electronic controls or as single-lever mixer, in line with technical specifications DIN EN 817, with flexible high pressure supply tubes with W543/KTW/W270 with DVGW / KIWA / CSTB / WRAS approval length in mm 380 with G 3/8 union nuts, noise behaviour in compliance with DIN 4109 Group I, approval mark applied for, Cache aerator M 21.5 x I, powered by a 230 V power supply, control electronics with programming options, activation optoelectronic or via integrated ceramic cartridge with hot water safety device, operation at pressures over 5 bar requires a pressure reducing valve, flow class A for single-lever mixer operation / approx. 5.0 l/min for electronic activation, max. warm water intake temperature 65 °C (as scald protection), with activatable cleaning mode for maintenance purposes, with magnet valve and dirt-catcher sieves as integrated unit within the fitting, with integrated sensor window, automatic valve closed after 90 sec. if optical unit under sensory operation, with backflow preventer on the intakes, with rapid installation set, spout projection 215 mm, spout height 238 mm, height complete 375 mm, for pressure type water heaters and for continuous line water heaters, PN 10,

### Product picture



### Dimensional drawing

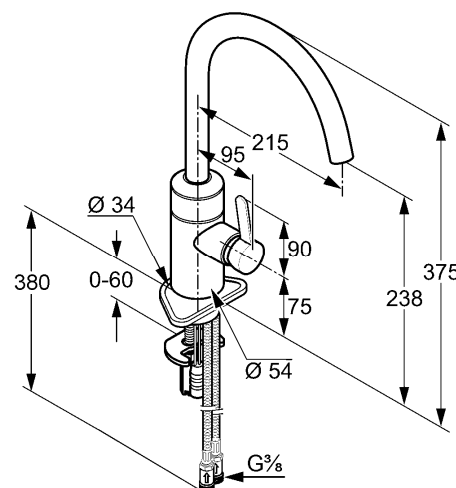

### Flow rate diagram

