


# 38206N1

2-in-1 Auto sensor faucet

KLUDI 

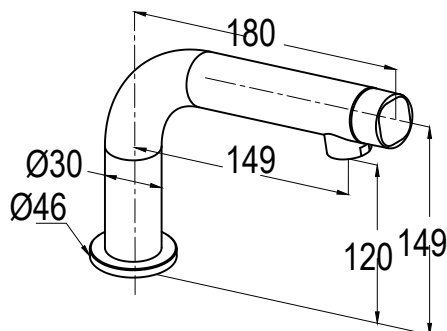

## Technical Specifications:

|                       |                   |
|-----------------------|-------------------|
| Suite:                | KLUDI-WAVE        |
| Flow Rate:            | 3.9L/min at 3 bar |
| Power supply:         | AC100-240V        |
| Color:                | Brushed Bronze    |
| Max protect run time: | 60 seconds        |
| Aerator:              | Neoperl           |
| Dimensions:           | 198×158mm         |
| Capacity:             | 3000ml            |


## Code:

38206N1

## Name:

KLUDI-WAVE  
2-in-1 AUTO SENSOR FAUCET WITH SOAP DISPENSER - DECK MOUNTED  
laser sensor activation  
blue and red LED light display  
The left sensor is for water and the right sensor is for soap  
electric power supply AC100-240V  
Water pressure 0.05 MPa – 0.80 MPa  
G½" inlet thread  
3000ml bottle capacity, output volume 0.6-2.0ml/cycle  
Suitable soap viscosity, Liquid: 100-3500cps  
Suitable soap PH 5-9  
Certified to BS EN 15091:2013 standard

## Water Flow Rate #:

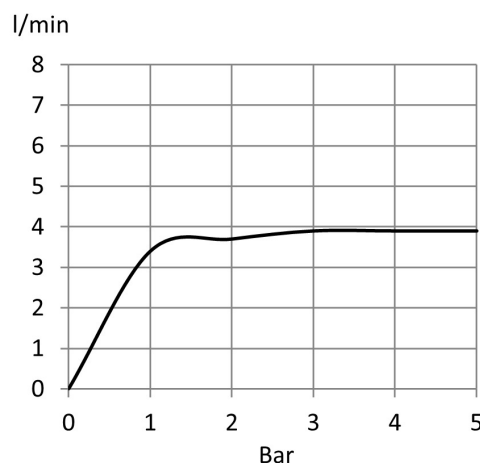

# variation: ± 15%

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items: ± 5% for below 200mm and ± 3% for above 200mm; for all other items tolerance ± 1%. Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.